


GT-LCLCDS2Y-xM

LC/LC Duplex Singlemode OS2 9/125 Cable Yellow- xM

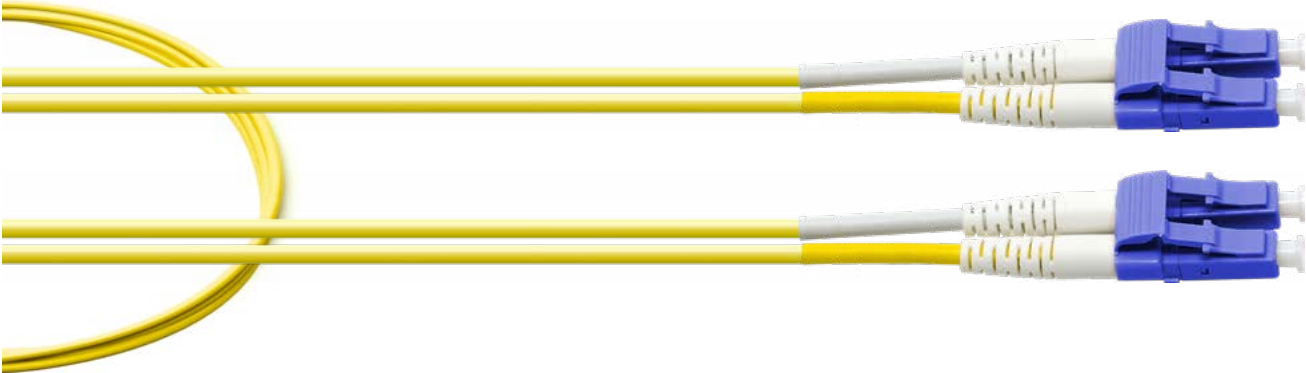

The GigaTech Products **GT-LCLCDS2Y-xM** fiber optic patch cords are ideal for short distance patching applications. These fiber optic cables have been built to exceed industry standards and are tested for insertion loss and reflectance on all connectors. They are constructed using Corning glass within UL certified OFNR (Riser) rated jacket with Kevlar yarn, and are factory terminated resulting in uncompromised performance.

Performance:


- Insertion Loss (max.): 0.3dB
- Return Loss: >55dB
- Storage Temperature: -40°C +80°C
- Operation Temperature: -20°C +70°C
- Mating Durability: <0.2dB
- Attenuation dB/km max.: 1.0

Fiber:

- Core Diameter: 9µm
- Cladding Diameter: 125µm
- Inner Strength Material: Kevlar
- Connector Type (1): LC
- Connector Style(1): Duplex
- Connector Type (2): LC
- Connector Style (2): Duplex

Jacket:

- Jacket Size: 1.25mm
- Jacket Style: Duplex Zipcord PVC
- Jacket Color: Yellow
- Fire Rating: OFNR (Riser)

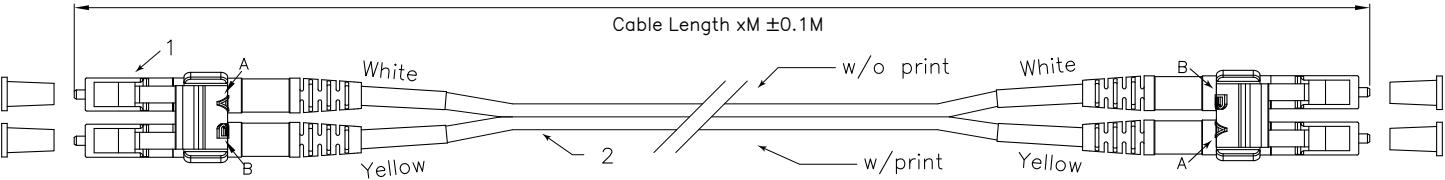

1	Mode	Ferrule	Housing	Clip	Boot	Tube	Cap
	SM	Zirconia(Ø1.25mm)	Blue(PC)	Blue(PP)	White(TPE)	White/Yellow(PVC)	White(PE)

2	Category	Jacket O.D.	Jacket Material	Color
	G.65782(9/125um)	Ø2mm	PVC OFNR	Yellow