

GT-SCASCADS2Y-xM

SC-APC/SC-APC Duplex Singlemode OS2 9/125 Cable Yellow- xM



The GigaTech Products **GT-SCASCADS2Y-xM** fiber optic patch cords are ideal for short distance patching applications. These fiber optic cables have been built to exceed industry standards and are tested for insertion loss and reflectance on all connectors. They are constructed using Corning glass within UL certified OFNR (Riser) rated jacket with Kevlar yarn, and are factory terminated resulting in uncompromised performance.

Performance:


Insertion Loss (max.): 0.3dB
 Return Loss: >60dB
 Storage Temperature: -40°C +80°C
 Operation Temperature: -20°C +70°C
 Mating Durability: <0.2dB
 Attenuation dB/km max.: 1.0

Fiber:

Core Diameter: 9µm
 Cladding Diameter: 125µm
 Inner Strength Material: Kevlar
 Connector Type (1): SC-APC
 Connector Style(1): Duplex
 Connector Type (2): SC-APC
 Connector Style (2): Duplex

Jacket:

Jacket Size: 2mm
 Jacket Style: Duplex Zipcord PVC
 Jacket Color: Yellow
 Fire Rating: OFNR (Riser)

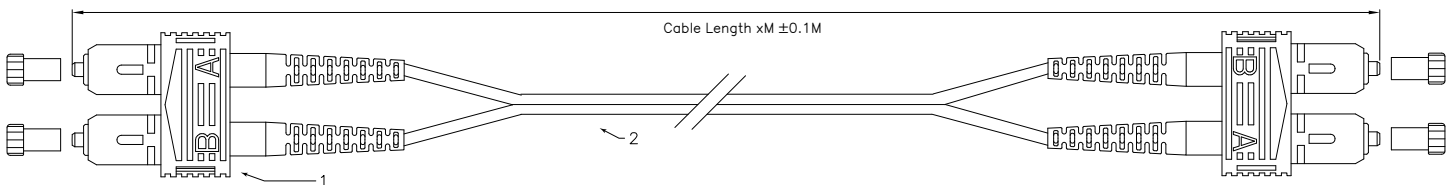

1	Mode	Ferrule	Housing	Clip	Boot	Cap
	SM-APC	Zirconia(Ø2.5mm)	Green(PBT)	Green(ABS)	Green(TPE)	Clear(PE)

2	Category	Jacket O.D.	Jacket Material	Color
	G.65782(9/125um)	Ø2mm	PVC OFNR	Yellow